

WIRE SUSPENSION "G" SHAPE



INDEX

1. Code registry
2. Description
3. Use
4. Features
5. Technical specification

1. REGISTRY CODE


Code	Description	Measures (mm)	Weight (kg/pcs.)*	Color	Pkg. / Pallet
GAN01-5135	Straight suspension wire ø 4 type G - 125 mm	125	0,0150	Gray	100 pcs. / 50.000 pcs.
GAN01-5136	Straight suspension wire ø 4 type G - 250 mm	250	0,0261	Gray	100 pcs. / 20.000 pcs.
GAN01-5137	Straight suspension wire ø 4 type G - 375 mm	375	0,0377	Gray	100 pcs. / 21.000 pcs.
GAN01-5138	Straight suspension wire ø 4 type G - 500 mm	500	0,0494	Gray	100 pcs. / 10.000 pcs.
GAN01-5139	Straight suspension wire ø 4 type G - 750 mm	750	0,0727	Gray	100 pcs. / 10.000 pcs.
GAN01-5140	Straight suspension wire ø 4 type G - 1000 mm	1000	0,0960	Gray	100 pcs. / 10.000 pcs.
GAN01-5141	Straight suspension wire ø 4 type G - 1500 mm	1500	0,1425	Gray	100 pcs. / 5.000 pcs.
GAN01-5142	Straight suspension wire ø 4 type G - 2000mm	2000	0,1891	Gray	100 pcs. / 5.000 pcs.
GAN01-5143	Straight suspension wire ø 4 type G - 2500 mm	2.500	0,2356	Gray	100 pcs. / 5.000 pcs.
GAN01-5144	Straight suspension wire ø 4 type G - 3000mm	3000	0,2822	Gray	100 pcs. / 5.000 pcs.

* tolerance ±5% according EN10143

MATERIAL Made of drawn wire ø 4,00 mm

2. DESCRIPTION

Suspension wire with open U-shaped eyelet. A quick hook or butterfly spring can be mounted on the straight end.
 Available in 10 sizes, from 125 mm to 3000 mm.
 Reaction to fire Class A1

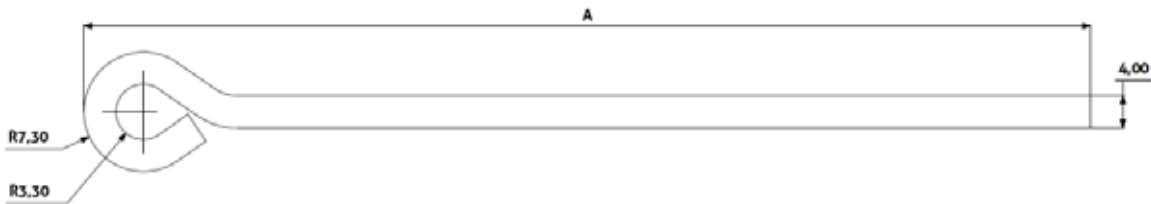

A (mm)									
125	250	375	500	750	1000	1500	2000	2500	3000

WIRE SUSPENSION "G" SHAPE

3. USE

Used for suspension of false ceilings and attaching metal structures to plasterboard.

4. FEATURES

Material	Made of drawn wire	-
Coating	Zinc - min Z100	EN 10327
Body thickness	4,00 mm	EN 10143
Load	0,50 kN	-
Reaction to fire	A1 Class	EN 14195
Durability	B Class	-
Box	100 pcs.	-

5. TECHNICAL SPECIFICATIONS

Item	Description	Unit	Price
Dak.B.GAN01.51xxB	Straight suspension wire with folded closed loop. Available in 10 measures, from 125 mm to 3000 mm. Reacting to fire Class A1 Packaged in boxes by 100 pcs.. Made of drawn wire Used for suspension of false ceilings and attaching metal structures to plasterboard. o.		
Dak.B.GAN01.5124B	Suspension wire ø 4 fold type G - 125 mm.....	pkg.	-
Dak.B.GAN01.5125B	Suspension wire ø 4 fold type G - 250 mm.....	pkg.	-
Dak.B.GAN01.5126B	Suspension wire ø 4 fold type G- 375 mm.....	pkg.	-
Dak.B.GAN01.5127B	Suspension wire ø 4 fold type G- 500 mm.....	pkg.	-
Dak.B.GAN01.5128B	Suspension wire ø 4 fold type G - 750 mm.....	pkg.	-
Dak.B.GAN01.5129B	Suspension wire ø 4 fold type G - 1.000 mm.....	pkg.	-
Dak.B.GAN01.5130B	Suspension wire ø 4 fold type G -1.500 mm.....	pkg.	-
Dak.B.GAN01.5131B	Suspension wire ø 4 fold type G - 2.000 mm.....	pkg.	-
Dak.B.GAN01.5132B	Suspension wire ø 4 fold type G - 2.500 mm.....	pkg.	-
Dak.B.GAN01.5133B	Suspension wire ø 4 fold type G - 3.000 mm.....	pkg.	-