CHANNEL DAKUA* SLIM STAINLESS STEEL GRATING



INDEX


- 1. Registry codes
- 2. Description
- 3. Use
- 4. Technical specification

1. REGISTRY CODES

Code	Description	Measures (mm)	Weight	Colore	Pkg. / Pallet
POZ93-117600	Channel DAKUA* Slim Kit - 600	25 x 600	1,85 kg/pz.	Steel	1 pcs. / 56 pcs.
POZ93-117700	Channel DAKUA* Slim Kit - 700	25 x 700	2,10 kg/pz.	Steel	1 pcs. / 56 pcs.
POZ93-117800	Channel DAKUA* Slim Kit - 800	25 x 800	2,30 kg/pz.	Steel	1 pcs. / 45 pcs.
POZ93-117900	Channel DAKUA* Slim Kit - 900	25 x 900	2,50 kg/pz.	Steel	1 pcs. / 40 pcs.

MATERIAL

Grating and channel body are made of AISI 304 stainless steel, trap siphoned element and outlet body are made of ABS, water-proof sheet is made of polyester

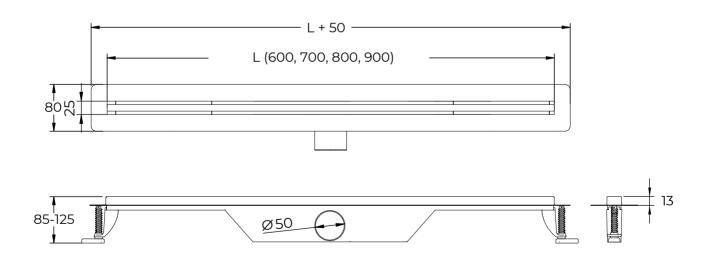

CHANNEL DAKUA* SLIM STAINLESS STEEL GRATING

2. DESCRIPTION

Channel with a modern, essential and funtional design.

The block body channel is made up of AISI 304 stainless with a 90° bended external edge that allow to be installed closed to the wall.

Moreover, thanks to the absence of welds and screws, ensures easy cleaning and high hygiene standards. The body channel, contains a siphon, a removable basket and a gasket.

The flow rate (25 litres/s) is high, even with lowered heights.

The kit is ready for installation, with the provided pre-assembled grating and includes a waterproof pre-cut polyester sheet, which is shaped to the edge of the channel to protect it against infiltration under the floor.

3. USE

This channel is used for the shower water collection, fitting with the floor and embellishing the surface aesthetics.

4. VOCI DI CAPITOLATO

Item	Description	Unit	Price
Dak.D.POZ93.117x00	Supply and installation of the DAKUA+ Slim line, featuring a modern, essential and funtional design. The block body channel is made up of AISI 304 stainless with a 90° bended external edge that allow to be installed closed to the wall. Moreover, thanks to the absence of welds and screws, ensures easy cleaning and high hygiene standards. The body channel, contains a siphon, a removable basket and a gasket. The flow rate (25 litres/s) is high, even with lowered heights. The kit is ready for installation, with the provided pre-assembled grating and includes a waterproof pre-cut polyester sheet, which is shaped to the edge of the channel to protect it against infiltration under the floor. Grating and channel body are made of AISI 304 stainless steel, trap siphoned element and outlet body are made of ABS, waterproof sheet is made of polyester. Used for the shower water collection, fitting with the floor and embellishing the surface aesthetics.		
Dak.D.POZ93.117600	Slim - 600 mm	pc	-
Dak.D.POZ93.117700	Slim - 700 mm.	pc	-
Dak.D.POZ93.117800	Slim - 800 mm	pc	-
Dak.D.POZ93.117900	Slim - 900 mm	pc	-



