

ARKIMEDE 35 - DECKING



INDEX

- 1. Code registry
- 2. Description
- 3. Use
- 4. Fields of use
- 5. Load test
- 6. Technical specification

1. CODE REGISTRY


Code Adjustable Support	Product	Lenght (mm)	Weight (kg)	Pallet
TER09-1143/1A	ARKIMEDE - fixed tab adjustable support	from 35 to 60	0,158	30 pcs. / 1.200 pcs..

MATERIAL

Made of PP (polypropylene)

COLOUR

Black

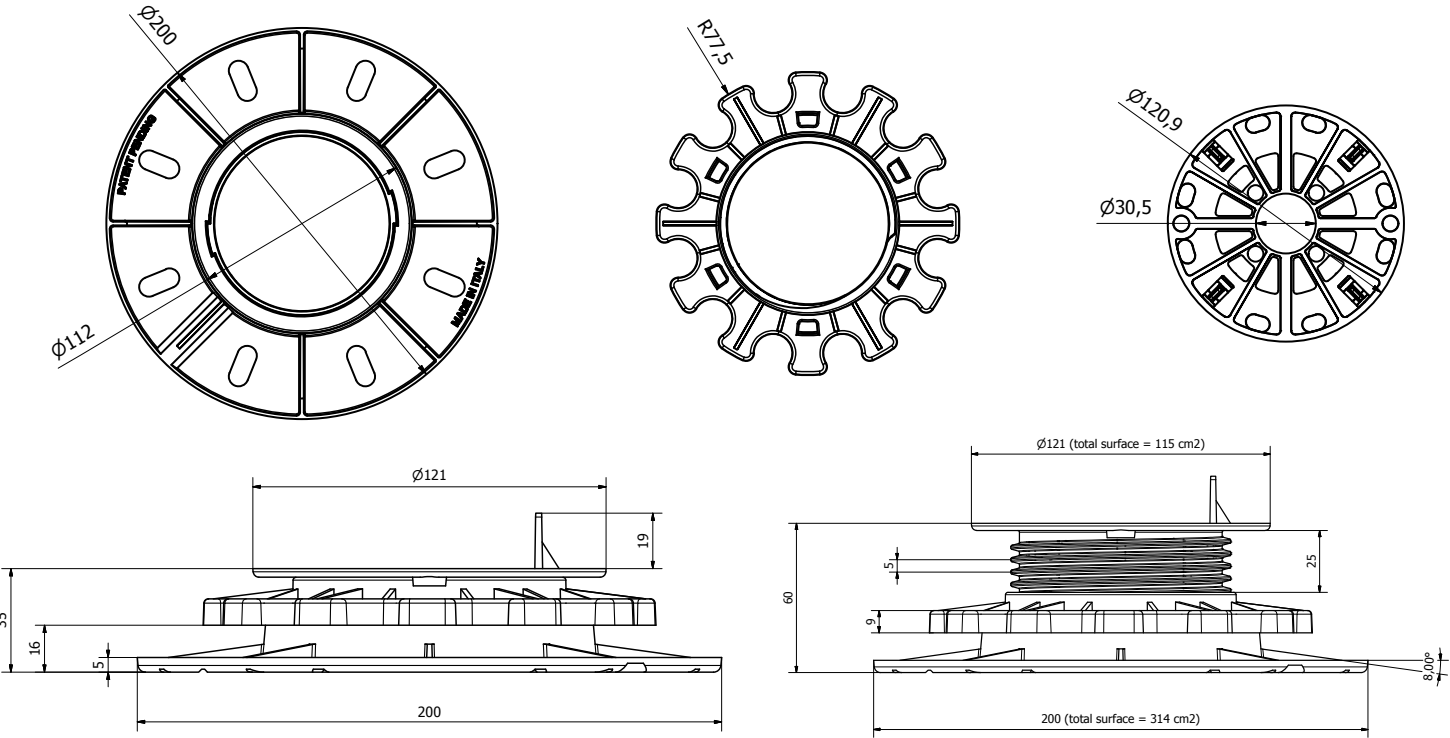

ARKIMEDE 35 - DECKING

2. DESCRIPTION

ARKIMEDE 35 support with adjustable height starting from 35 mm.

Base laying surface: 314 cm².

Head diameter: 120 mm with a laying surface of 113 cm².

Available versions:

• Box composed by the base, rotating nut and head with 1 tab for joists.

The base allows the correct water drainage.

Extension for adjustable support ARKIMEDE 35 with 25, 50, 100 mm height available.

3. USE

Use in outdoor areas, terraces, shared flooring

Operating temperature: from - 40 ° C to + 60 ° C.

The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

5. LOADED TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-T143/1A	Half height	17,36	1.770,3	3.899,30
	Full height	9,80	999,4	2.201,30

6. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.TER09-T143/x	Supply and intallation of adjustable support with adjustable height from min 35 to max 500 mm according to the matching accessories. Made of PP (polypropylene). Used in external areas, terraces, pavements.	pcs.	-
Dak.O.TER09-T143/1A	1 tab.....	pcs.	-