

ARKIMEDE 18 - DECKING



INDEX






1. Code Registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight (kg)	Pkg. / Pallet
TER09-1145/1A	ARKIMEDE 18 - Decking	from 18 to 36	0,157	30 pcs / 1.200 pcs


MATERIAL

Made of PP (polypropylene).

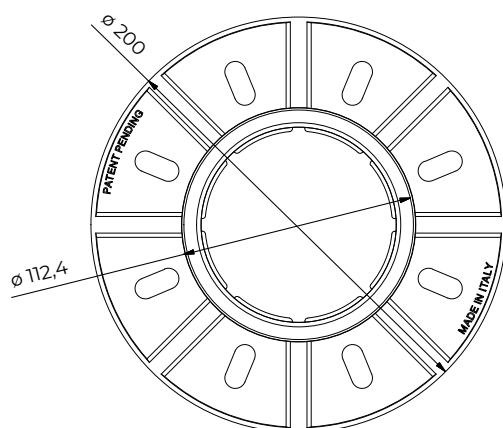

OUTDOOR

ARKIMEDE 18 - DECKING

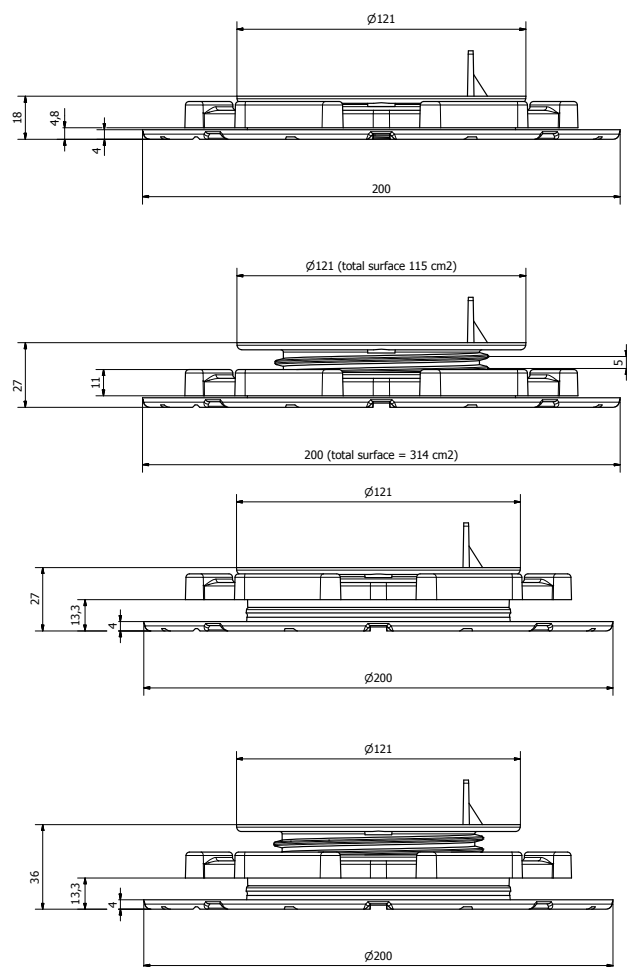

2. DESCRIPTION

ARKIMEDE 18 support with adjustable height starting from 18 mm.

Base laying surface: 314 cm².

Head diameter: 120 mm with a laying surface of 113 cm².

Available versions:

· Box composed by the base, rotating nut and head with 1 tab for decking and **9 mm extension**.

The base allows the correct water drainage.

3. USE

Used in external areas, terraces, pavements.

Operating temperature: from -40°C to +60°C.

The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

ARKIMEDE 18 - DECKING

5. LOAD TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1145/1A	Mezza altezza	18,00	1.835,50	4.042,90
	Tutta altezza	10,45	1.066,4	2.348,90

6. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.TER09.1145/x	Supply and installation of ARKIMEDE 18 DECKING support with adjustable height starting from 18 mm to a maximum of 36 mm. Base laying surface: 314 cmq. Head diameter: 120 mm with a laying surface of 113 cmq. Available versions: • Box composed by the base, rotating nut and head with 1 tab for joists and 9 mm extension. The base allows the correct water drainage. Made of PP (polypropylene). Used in external areas, terraces, pavements.	pcs	-
Dak.O.TER09.1145/1A	1 tab.....	pcs	-