

ARKIMEDE 60 - DECKING





INDEX

1. Code Registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification

1. CODE REGISTRY


Code	Description	Dimension (mm)	Weight (kg)	Pkg. / Pallet
TER09-1163/1A	ARKIMEDE 60-Decking	from 60 to 115	0,24	30 pcs. / 450 pcs.

MATERIAL Made of PP (polypropylene).

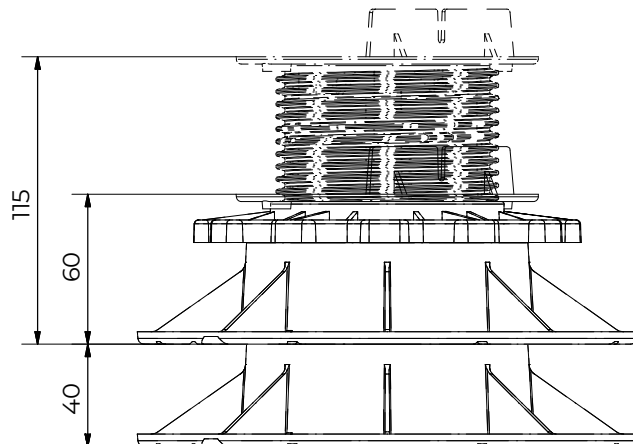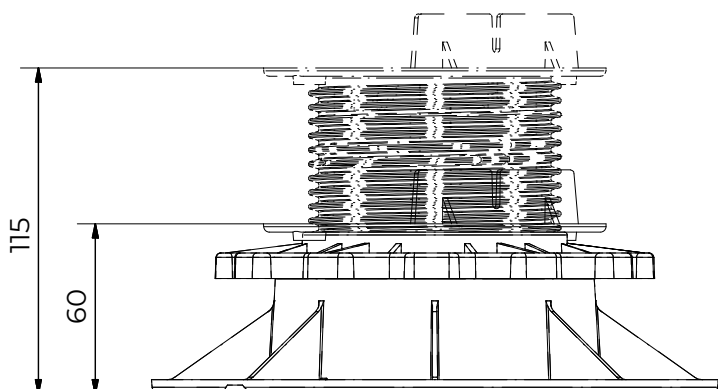

Each base has a special bottom shape that allows to be stack on another base.

ARKIMEDE 60 - DECKING

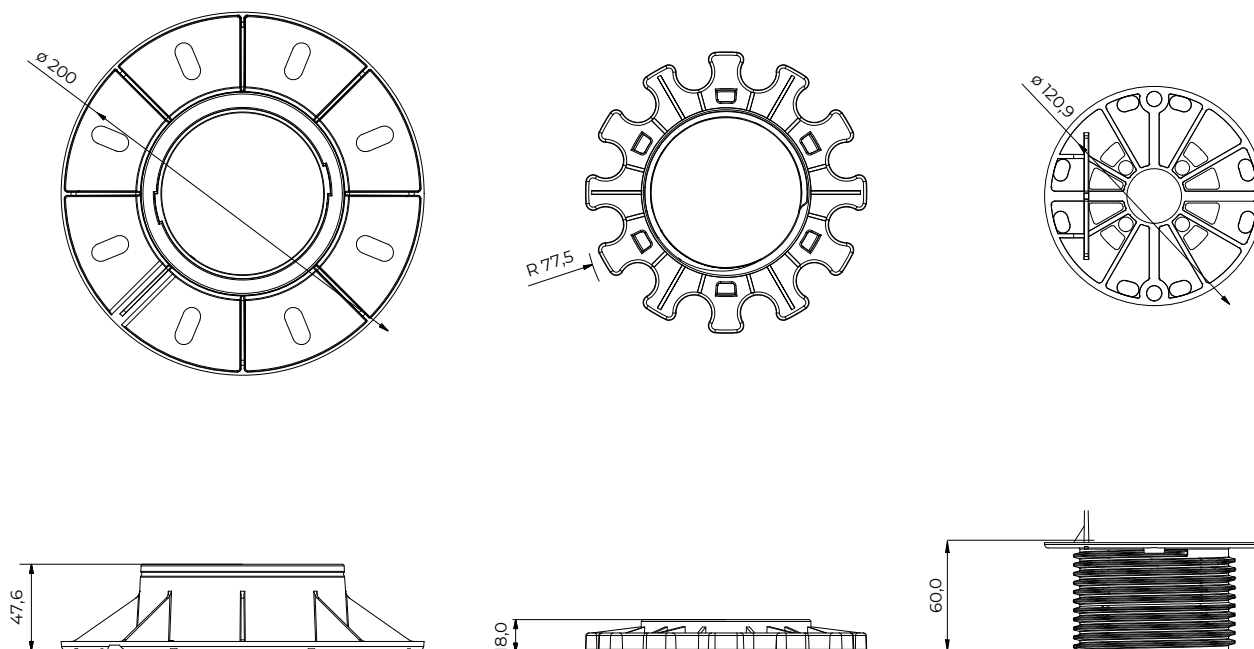

2. DESCRIPTION

Arkimede 60 support with adjustable height starting from 60 mm.
Base laying surface: 314 cm². Head diameter: 120 mm with a laying surface of 113 cm².
• Box composed by the base, rotating ring and head with 1 tab for joists.


The base allows the correct water drainage.
• Extension h. 50 and 100 are available as an optional.

3. USE

Used in external areas, terraces, pavements.
Operating temperature: from -40°C to +60°C.
The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

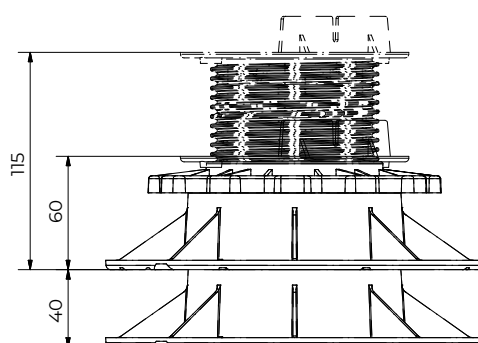

TER09-1163/1A

TER09-1163/P40

ARKIMEDE 60 - DECKING

5. LOAD TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1163/1A	Half height	14,63	1.492,2	3.286,80
	Full height	10,47	1.068,2	2.352,90

6. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.TER09-1163/x	Supply and installation of ARKIMEDE 60 - Decking support with adjustable height starting from 60 mm. Base laying surface: 314 cm². Head diameter: 120 mm with a laying surface of 113 cm². Available versions: · Box composed by the base, rotating nut and head with 1 tab for joists. The base allows the correct water drainage. Made of PP (polypropylene). Used in external areas, terraces, pavements.	pcs.	-
Dak.O.TER09-1163/1A	1 tab.....	pcs.	-