


CANALETTA DAKUA⁺ PLUS - DUO

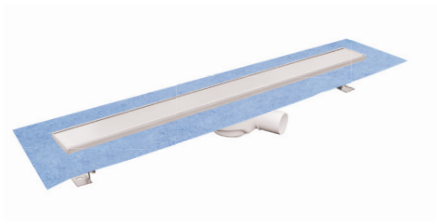


INDEX

- 1. Registry codes
- 2. Description
- 3. Use
- 4. Technical specification

1. REGISTRY CODES

Code	Description	Measures (mm)	Weight (kg/pz.)	Color	Pkg. / Pallet
POZ93-118600/D	DAKUA ⁺ with Stainless Steel Grating Duo Kit - 600	78 x 600	1,80	Acciaio	1 pc. / 81 pcs.
POZ93-118700/D	DAKUA ⁺ with Stainless Steel Grating Duo Kit - 700	78 x 700	2,10	Acciaio	1 pc. / 81 pcs.
POZ93-118800/D	DAKUA ⁺ with Stainless Steel Grating Duo Kit - 800	78 x 800	2,40	Acciaio	1 pc. / 66 pcs.
POZ93-118900/D	DAKUA ⁺ with Stainless Steel Grating Duo Kit - 900	78 x 900	2,70	Acciaio	1 pc. / 60 pcs.

MATERIAL Stainless steel (Channel and Grating) - ABS (Siphon and outlet body) - Waterproof polyester fabric (Waterproof sheet).

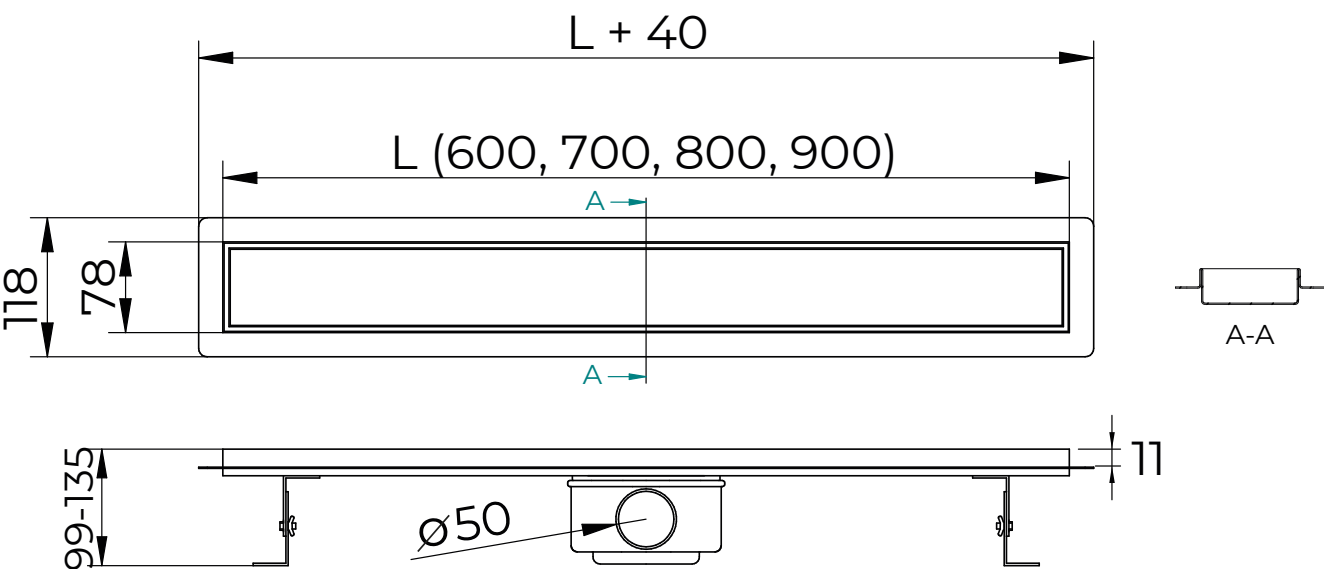

CANALETTA DAKUA⁺ PLUS - DUO

2. DESCRIPTION

The DAKUA⁺ Plus range guarantees the best functionality combined with a modern design. The block body channel is made of AISI 304 stainless steel that, thanks to the absence of bendings, welds and screws, ensures an easy cleaning and high hygiene standards. The flow rate (44 litres/min) is high, even with lowered heights. All gratings are interchangeable and available in polished, brushed steel or glass. The kit is composed of:

- A preassembled grating, ready to install
- A waterproof polyester sheet, shaped on the edge of the channel
- A channel body and a stainless steel grating with glass coating
- ABS siphoned cup with joint and a 360° adjustable and removable gasket

The product, that suits the flat flooring, improves the aesthetics of each surface whilst granting the collection of shower waters.

3. USE

This channel is used for the collection of the shower water. It fits perfectly with the floor embellishing the surface aesthetics.

4. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
Dak.D.POZ93.118x00/D	Supply and installation of a floor-level channel with a modern, minimalist, and functional design. The channel body is made of AISI 304 stainless steel, with a perimeter edge and coating that has no recesses, welds, or screws, ensuring easy cleaning and high hygiene standards. The channel body, passivated by connection to the grounding system, contains a siphon, a removable basket, and a removable 360° adjustable gasket. The water discharge capacity is high (44 l/min) even at low heights. The grate is interchangeable and "double-sided," made of brushed steel. The kit is complete, ready for installation, and also includes a pre-shaped waterproof polyester sheet to be inserted on the perimeter edge of the channel to prevent infiltration under the floor. Channel body and grate entirely in AISI 304 stainless steel, siphon block with gasket and basket in ABS, and pre-shaped waterproof polyester sheet. Floor-mounted, for collecting waste water from showers and/or toilets, it allows for aesthetic uniformity, easy positioning on the floor, and easy calculation of slopes by positioning it against the wall at the junction between the floor and the wall covering.		
Dak.D.POZ93.118600/D	Grating Duo - 600 mm.....	pZ.	-
Dak.D.POZ93.118700/D	Grating Duo - 700 mm.....	pZ.	-
Dak.D.POZ93.118800/D	Grating Duo - 800 mm.....	pZ.	-
Dak.D.POZ93.118900/D	Grating Duo - 900 mm.....	pZ.	-