

PENTA - REUSABLE MULTI-THICKNESS SPACER




INDEX

1. Code Registry
2. Description
3. Use
4. Measure conversion table
5. Technical Specification

1. CODE REGISTRY

Code	Description	Colour	(mm)	Weight	Bag / Pkg. / Pallet	U. M.
TER04-4415	Penta - Reusable multi-thickness spacer - 200 pcs.	Blue	0,5 - 1 - 1,5 - 2 - 3	0,450 kg/bag	20 bags / 300 bags	bag
TER04-4416	Penta - Reusable multi-thickness spacer - 600 pcs.	Blue	0,5 - 1 - 1,5 - 2 - 3	1,600 kg/box	1 box. / 80 box.	box

MATERIAL Made of PP (polypropylene)

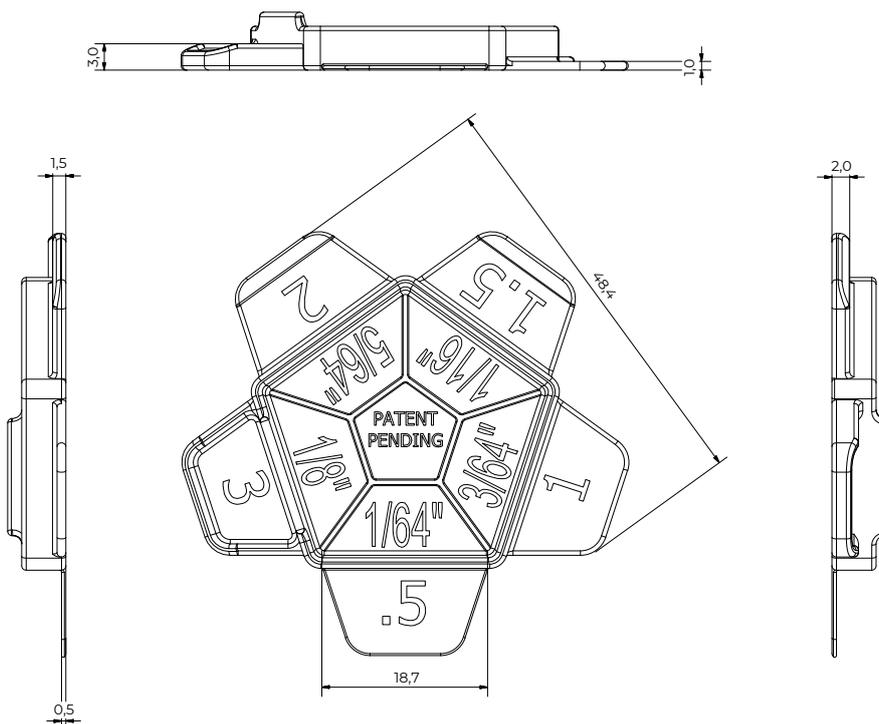

PENTA - REUSABLE MULTI-THICKNESS SPACER

2. DESCRIPTION

Reusable multi-thickness grout spacer for tiles.

With a single product it is possible to lay tiles with a grout line of 0.5, 1, 1.5, 2, 3 mm.

Penta is:

- This new generation of Tile Spacer is studied according the UNI 11493-1 Standard (Methodology for the correct installation of ceramic tiles).
- Designed to guarantee different grout lines (from 0.5 to 3 mm).
- Marked to make easily visible each of the 5 sides of the product to which different thicknesses correspond.
- Can to be used both on the floor and on the wall.
- Packed in boxes of 600 pcs. and / or in bags of 200 pcs. (20 bags/box).

3. USE

Used as a spacer for laying both floor and wall tiles.

4. MEASURE CONVERSION TABLE

mm	inches	mm	inches	mm	inches	mm	inches
0,5	1/64"	5	3/16"	20	9/16"	60	2 3/8"
1	3/64"	6	9/32"	26	1"	66	2 5/8"
1,5	1/16"	7	9/32"	35	1 3/8"	90	3 9/16"
2	5/64"	10	3/8"	36	1 7/16"	115	4 1/2"
2,5	7/64"	12	1/12"	38	1 1/2"	170	6 3/4"
3	1/8"	15	9/16"	41	1 5/8"	220	8 2/3"
4	5/32"	18	3/4"	45	1 3/4"		

5. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.I.TER04.441x	Product for installation of the reusable multi-thickness grout spacing for tiles. With a single product it is possible to install tiles with a spacer of 0.5, 1, 1.5, 2, 3 mm. Penta is: · The new generation of Tile Spacer studied according the UNI 11493-1 Standard (Methodology for the correct installation of ceramic tiles). · Designed to guarantee of different grout spacing thickness (from 0.5 to 3 mm). · Marked to make easily visible each of the 5 sides of the product to which different thicknesses correspond. · Made in order to be used both on the floor and on the wall. · Packaged in boxes of 600 pcs and / or in envelopes of 200 pcs (boxes of 20 envelopes). Made of PP (polypropylene). Used as a spacer for laying both floor and wall tiles.		
Dak.I.TER04.4415	Bags of 200 pcs.....	bags	-
Dak.I.TER04.4416	Boxes of 600 pcs.....	box	-