

ARKIMEDE 35 - PAVING



INDEX

1. Code Registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification

1. CODE REGISTRY




Code Adjustable Support	Product	Lenght (mm)	Weight (kg)	Pkg. / Pallet
TER09-1143/4A2M	ARKIMEDE 35 - 4 tabs adjustable support - 2 mm joint	from 35 to 60	0,158	30 pcs. / 1.350 pcs.
TER09-1143/4A4M	ARKIMEDE 35 - 4 tabs adjustable support - 4 mm joint	from 35 to 60	0,158	30 pcs. / 1.350 pcs.

MATERIAL

Made of PP (polypropylene).

COLOUR

Black

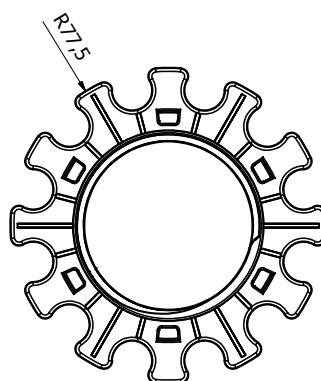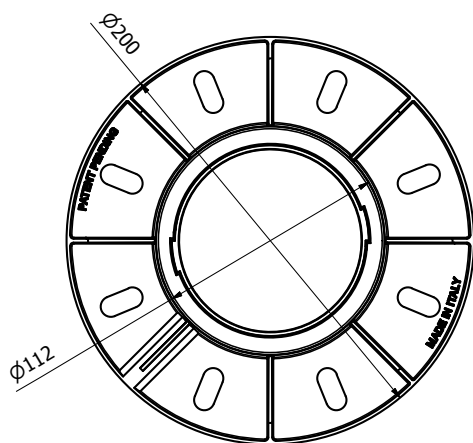

OUTDOOR

ARKIMEDE 35 - PAVING

2. DESCRIPTION

ARKIMEDE 35 support with adjustable height starting from 35 mm.

Base laying surface: 314 cm².

Head diameter: 120 mm with a laying surface of 113 cm².

Available versions:

• Box composed by the base, rotating nut and head with 4 spacer tabs of 2 mm thickness.

• Box composed by the base, rotating nut and head with 4 spacer tabs of 4 mm thickness.

The base allows the correct water drainage.

Extension for adjustable support ARKIMEDE 35 with 25, 50, 100 mm height available.

3. USE

Use in outdoor areas, terraces, shared flooring.

Operating temperature: from - 40 ° C to + 60 ° C

The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

5. LOAD TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-T143/4A2M	Half height	17,36	1.770,3	3.889,30
TER09-T143/4A4M	Full height	9,80	999,4	2.201,30

6. TECHNICAL SPECIFICATION

Voice	Description	Unity	Price
Dak.O.TER09-T143/4AxM	Supply and intallation of adjustable support with adjustable height from min 35 to max 500 mm according to the matching accessories. Made of PP (polypropylene). Used in external areas, terraces, pavements	pcs.	-
Dak.O.TER09-T143/4A2M	Arkimede 35 paving - 2 mm joint.....	pcs.	-
Dak.O.TER09-T143/4A4M	Arkimede 35 paving - 4 mm joint.....	pcs.	-

