

ARKIMEDE 10 - DECKING




INDEX


- 1. Code registry
- 2. Description
- 3. Use
- 4. Fields of use
- 5. Load test
- 6. Technical specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight (kg)	Pkg / Pallet
TER09-1147/1A	ARKIMEDE 10 - Decking	from 10 to 20	0,17	30 pcs. / 810 pcs.

MATERIAL Made of PP (polypropylene).

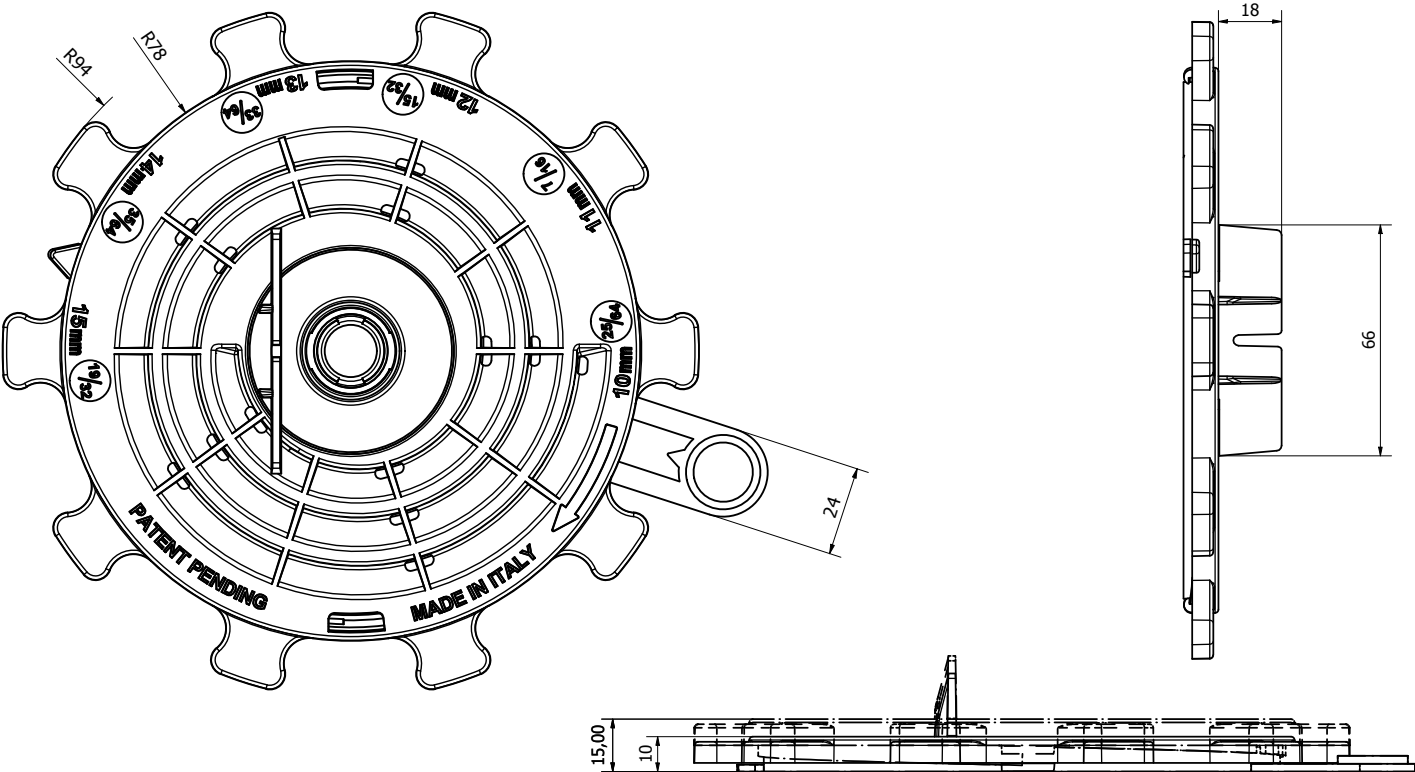

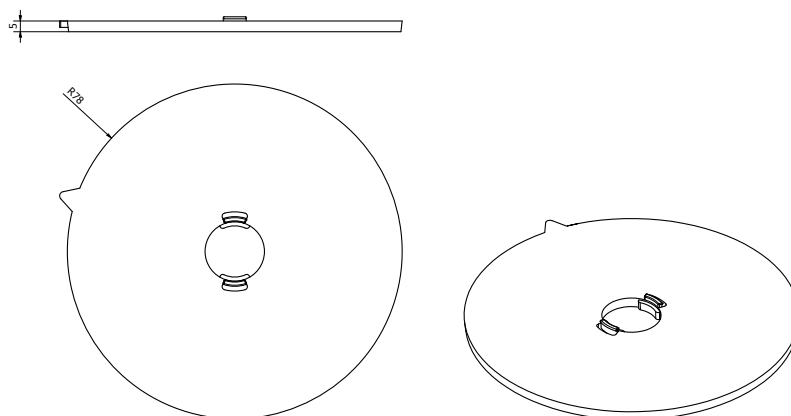

2. DESCRIPTION

Arkimede 10 telescopic support with adjustable height from a minimum 10 mm to a maximum of 20 mm. The head and the base have a diameter of 156 mm, with a support surface of 191 cm². Available versions: .

- Package composed of support for decking and **complete with 5 mm extension**

The base allows the correct water outflow.

3. USE

Used in external areas, terraces, pavements.

Operating temperature: from -40°C to +60°C.

The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

5. LOAD TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1147/1A	Compressive strength of 1.5 mm	11,92	1.093,93	2,412,19

6. TECHNICAL SPECIFICATION

Voce	Descrizione	Unità	Prezzo
Dak.O.TER09.1147/x	Supply and installation of telescopic support adjustable in height, equipped with 5 mm extension Dimensions: head and base ø 156 mm, support surface 191 cm ² . Available in black color. Made of PP (polypropylene) Used in external areas, terraces, shared flooring.	pcs	-
Dak.O.TER09.1147/1A	1 tab.....	pcs	-