

# HERCULES PAVING - FIXED HEAD




## INDEX

- 1. Code registry**
- 2. Description**
- 3. Use**
- 4. Carrying capacity**
- 5. Fields of use**
- 6. Technical specification**


## 1. CODE REGISTRY

| Code             | Description                           | Dimensions (mm) | Weight (kg) | Pkg / Pallet         |
|------------------|---------------------------------------|-----------------|-------------|----------------------|
| TER09-1183/4F25  | Fixed Head Hercules for 4 mm joint    | from 25 to 37   | 0,22        | 30 pcs. / 720 pcs.   |
| TER09-1183/4F37  | Fixed Head Hercules for 4 mm joint    | from 37 to 60   | 0,28        | 30 pcs. / 480 pcs.   |
| TER09-1183/4F60  | Fixed Head Hercules for 4 mm joint    | from 60 to 94   | 0,40        | 25 pcs. / 300 pcs.   |
| TER09-1183/4F94  | Fixed Head Hercules for 4 mm joint    | from 94 to 150  | 0,54        | 20 pcs. / 160 pcs.   |
| TER09-1183/4F150 | Fixed Head Hercules for 4 mm joint    | from 150 to 270 | 0,73        | 15 pcs. / 120 pcs.   |
| TER09-1183/P120  | Extension only for Hercules 150 - 270 | h. 120          | 0,18        | 30 pcs. / 1.200 pcs. |
| TER09-1283CHI    | Adjustment key for Hercules           | -               | 0,20        | 1 pc. / -            |


**MATERIAL** Made of PP (polypropylene).

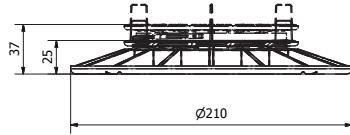

**TER09-1183/4F25**




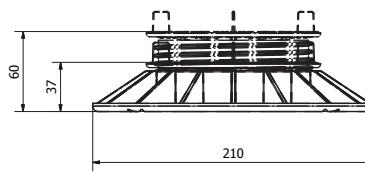


**TER09-1183/4F37**

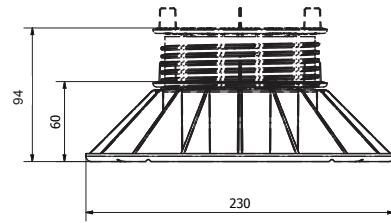


**TER09-1183/4F60**

# HERCULES PAVING - FIXED HEAD

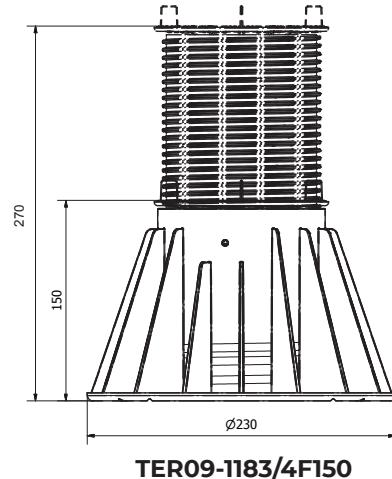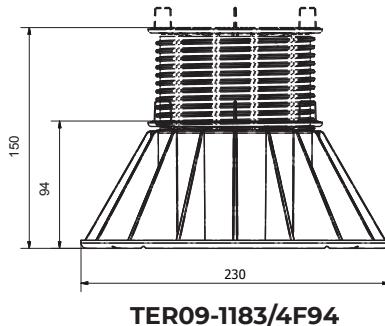

**BACK BASE**



**FIXED HEAD**

## 2. DESCRIPTION

Hercules adjustable support for outdoor flooring, with adjustable height from min. 25 to max. 390 mm (depending on the model used). Each pack contains the complete disassembled support with base, screw and fixed head for paving with 4 removable wings for 4 mm joints. The head is equipped with integrated anti-noise rubber. Only the model from h. 150 to 270 mm can be extended by applying the specific extension h. 120 mm (TER09-1183 / P120). The finalization of the adjustment of the support takes place with the floor installed using the appropriate key.

## 3. USE

Used in external areas, terraces, pavements.  
**The use of polishing and sanding machines is not recommended.**

## 4. CARRYING CAPACITY

- Minimum load capacity = 15 kN (totally extended)
- Maximum load capacity = 30 kN (completely not extended)

## 5. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans

# HERCULES PAVING - FIXED HEAD



## 6. TECHNICAL SPECIFICATION

| Code                          | Description   | Unit | Price |
|-------------------------------|---|------|-------|
| <b>Dak.D.TER09.1183/4Fxxx</b> | Supply and installation of adjustable support fixed head "Hercules", for paving. Dimensions from min. 25 to max. 390 mm (depending on the model used). Available in black colour<br>Made of polypropylene<br>Used in external areas, terraces, pavements. | pc.  | -     |
| <b>Dak.D.TER09.1183/4F25</b>  | Hercules with fixed head from 25 to 37 mm and base diameter of 210 mm.....  | pc.  | -     |
| <b>Dak.D.TER09.1183/4F37</b>  | Hercules with fixed head from 37 to 60 mm and base diameter of 210 mm.....  | pc.  | -     |
| <b>Dak.D.TER09.1183/4F60</b>  | Hercules with fixed head from 60 a 94 mm and base diameter of 230 mm.....   | pc.  | -     |
| <b>Dak.D.TER09.1183/4F94</b>  | Hercules with fixed head from 94 a 150 mm and base diameter of 230 mm.....  | pc.  | -     |
| <b>Dak.D.TER09.1183/4F150</b> | Hercules with fixed head from 150 a 270 mm and base diameter of 230 mm.....   | pc.  | -     |
| <b>Dak.D.TER09.1283/P120</b>  | Extension h.120mm in polypropylene compatible with Hercules support 150, TER09-1183/1F150 .....   | pc.  | -     |
| <b>Dak.D.TER09.1283/P120</b>  | Adjustment key for Hercules .....   | pc.  | -     |