

HERCULES PAVING - FIXED HEAD




INDEX

1. Code registry
2. Description
3. Use
4. Load test
5. Fields of use
6. Technical specification


1. CODE REGISTRY

Code	Description	Dimensions (mm)	Weight (kg)	Pkg / Pallet
TER09-1183/4F25	Fixed Head Hercules for 4 mm joint	from 25 to 37	0,22	30 pcs. / 720 pcs.
TER09-1183/4F37	Fixed Head Hercules for 4 mm joint	from 37 to 60	0,28	30 pcs. / 480 pcs.
TER09-1183/4F60	Fixed Head Hercules for 4 mm joint	from 60 to 94	0,40	25 pcs. / 300 pcs.
TER09-1183/4F94	Fixed Head Hercules for 4 mm joint	from 94 to 150	0,54	20 pcs. / 160 pcs.
TER09-1183/4F150	Fixed Head Hercules for 4 mm joint	from 150 to 270	0,73	15 pcs. / 120 pcs.
TER09-1183/P120	Extension only for Hercules 150 - 270	h. 120	0,18	30 pcs. / 1.200 pcs.
TER09-1283CHI	Adjustment key for Hercules	-	0,20	1 pc. / -


MATERIAL Made of PP (polypropylene).



TER09-1183/4F25

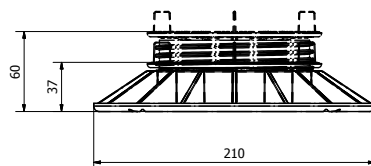

TER09-1183/4F37

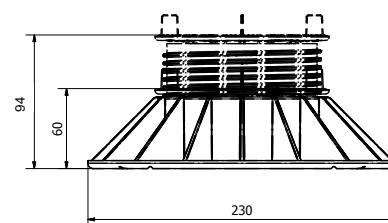


TER09-1183/4F60




OUTDOOR



HERCULES PAVING - FIXED HEAD

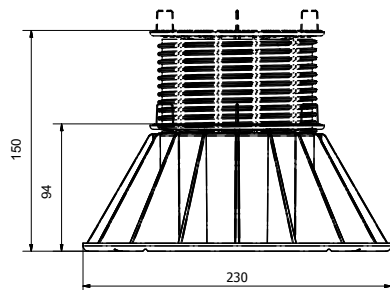


TER09-1183/4F94

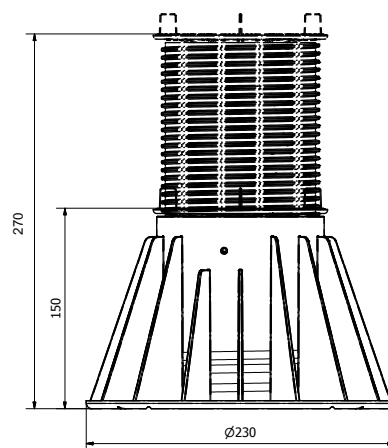

TER09-1183/4F150



BACK BASE

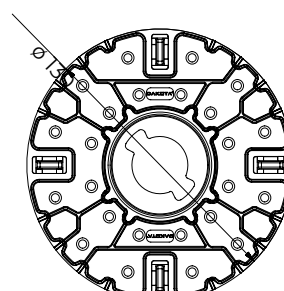

FIXED HEAD



TER09-1183/P120



TER09-1183/CHI

2. DESCRIPTION

Hercules adjustable support for outdoor flooring, with adjustable height from min. 25 to max. 390 mm (depending on the model used). Each pack contains the complete disassembled support with base, screw and fixed head for paving with 4 removable wings for 4 mm joints. The head is equipped with integrated anti-noise rubber. Only the model from h. 150 to 270 mm can be extended by applying the specific extension h. 120 mm (TER09-1183 / P120). The finalization of the adjustment of the support takes place with the floor installed using the appropriate key

3. USE

Used in external areas, terraces, pavements.
Operating temperature: from -40°C to +60°C.
The use of polishing and sanding machines is not recommended.

HERCULES PAVING - FIXED HEAD

4. LOAD TEST

In-House Self-Regulated Test:

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1183/4F25	Half height	42,36	4.319,40	9.514,20
	Full height	19,76	2.015,70	4.440,00
TER09-1183/4F37	Half height	33,98	3.465,30	7.632,90
	Full height	15,65	1.596,40	3.516,40
TER09-1183/4F60	Half height	39,22	3.998,90	8.808,10
	Full height	22,624	2.307,00	5.081,40
TER09-1183/4F94	Half height	37,77	3.851,20	8.482,80
	Full height	18,05	1.841,20	4.055,40
TER09-1183/4F150	Half height	39,26	4.003,80	8.818,8
	Full height	18,128	1.848,50	4.071,60

5. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans

6. TECHNICAL SPECIFICATION

Code	Description	Unit	Price
Dak.D.TER09.1183/4Fxxx	Supply and installation of adjustable support fixed head "Hercules", for paving. Dimensions from min. 25 to max. 390 mm (depending on the model used). Available in black colour Made of polypropylene Used in external areas, terraces, pavements.	pc.	-
Dak.D.TER09.1183/4F25	Hercules with fixed head from 25 to 37 mm and base diameter of 210 mm.....	pc.	-
Dak.D.TER09.1183/4F37	Hercules with fixed head from 37 to 60 mm and base diameter of 210 mm.....	pc.	-
Dak.D.TER09.1183/4F60	Hercules with fixed head from 60 a 94 mm and base diameter of 230 mm.....	pc.	-
Dak.D.TER09.1183/4F94	Hercules with fixed head from 94 a 150 mm and base diameter of 230 mm.....	pc.	-
Dak.D.TER09.1183/4F150	Hercules with fixed head from 150 a 270 mm and base diameter of 230 mm.....	pc.	-
Dak.D.TER09.1283/P120	Extension h.120mm in polypropylene compatible with Hercules support 150, TER09-1183/1F150	pc.	-
Dak.D.TER09.1283/P120	Adjustment key for Hercules	pc.	-