


HERCULES PAVING - SELF-LEVELING HEAD

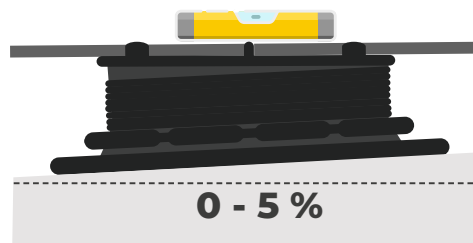


INDEX

1. Code registry
2. Description
3. Use
4. Load test
5. Fields of use
6. Technical specification


1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg / Pallet
TER09-1183/4L25	Hercules Paving - Self-Leveling Head 4 mm joint	from 25 to 37	0,22	30 pcs. / 720 pcs.
TER09-1183/4L37	Hercules Paving - Self-Leveling Head 4 mm joint	from 37 to 60	0,28	30 pcs. / 480 pcs.
TER09-1183/4L60	Hercules Paving - Self-Leveling Head 4 mm joint	from 60 to 94	0,40	25 pcs. / 300 pcs.
TER09-1183/4L94	Hercules Paving - Self-Leveling Head 4 mm joint	from 94 to 150	0,54	20 pcs. / 160 pcs.
TER09-1183/4L150	Hercules Paving - Self-Leveling Head 4 mm joint	from 150 to 270	0,73	15 pcs. / 120 pz.
TER09-1183/P120	Extension for Hercules 150 - 270	h. 120	0,18	20 pc.. / 300 pcs.
TER09-1283CHI	Adjustment key for Hercules	-	0,20	1 pcs. / -


MATERIAL Made of PP (polypropylene).



TER09-1183/4L25

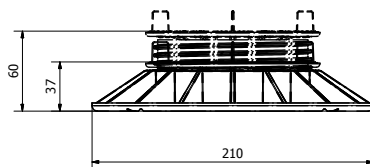


TER09-1183/4L37

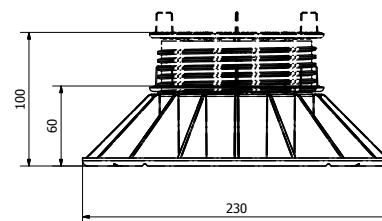


TER09-1183/4L60



HERCULES PAVING - SELF-LEVELING HEAD

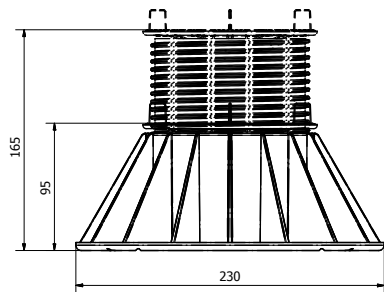


TER09-1183/4L94

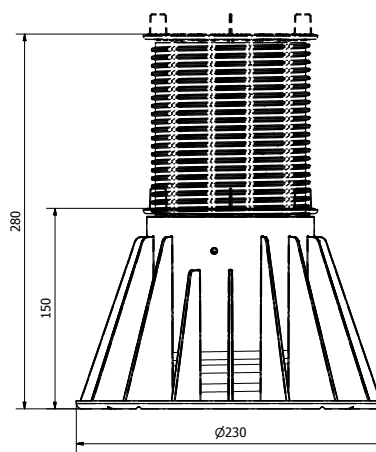

TER09-1183/4L150

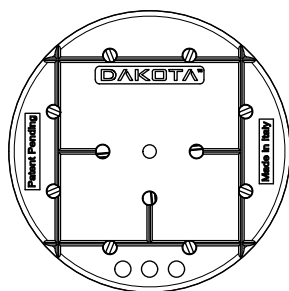

BACK BASE

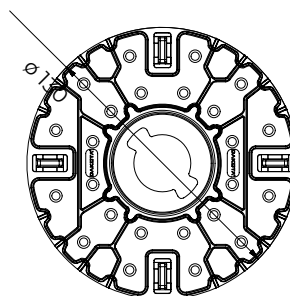

SELF-LEVELING HEAD



TER09-1183/P120



TER09-1183/CHI

2. DESCRIPTION

Hercules adjustable support for outdoor flooring, with adjustable height from min. 25 to max. 390 mm (depending on the model used).

Each pack contains the complete disassembled support with base, screw and self-levelling head (till 5%) for paving with 4 removable wings for 4 mm joints.

The head is equipped with integrated anti-noise rubber. Only the model from h. 150 to 270 mm can be extended by applying the specific extension h. 120 mm (TER09-1183 / P120). The finalization of the adjustment of the support takes place with the floor installed using the appropriate key.

3. USE

Used in external areas, terraces, pavements.

Operating temperature: from -40°C to +60°C.

The use of polishing and sanding machines is not recommended.

HERCULES PAVING - SELF-LEVELING HEAD

4. LOAD TEST

In-House Self-Regulated Test:

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1183/4L25	Half height	42,36	4.319,40	9.514,20
	Full height	19,76	2.015,70	4.440,00
TER09-1183/4L37	Half height	33,98	3.465,30	7.632,90
	Full height	15,65	1.596,40	3.516,40
TER09-1183/4L60	Half height	39,22	3.998,90	8.808,10
	Full height	22,624	2.307,00	5.081,40
TER09-1183/4L94	Half height	37,77	3.851,20	8.482,80
	Full height	18,05	1.841,20	4.055,40
TER09-1183/4L150	Half height	39,26	4.003,80	8.818,8
	Full height	18,128	1.848,50	4.071,60

5. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans

6. TECHNICAL SPECIFICATION

Code	Description	Unit	Price
Dak.D.TER09.1183/4Lxxx	Hercules adjustable support for outdoor flooring Dimensions, with height from min. 25 to max. 390 mm (depending on the model used). Available in black color Made of polypropylene Used in external areas, terraces, pavements.	pc.	-
Dak.D.TER09.1183/4L25	Hercules Paving - Self-Leveling Head 4 mm joint from 25 to 37 mm, base diameter 210 mm.....	pc.	-
Dak.D.TER09.1183/4L37	Hercules Paving - Self-Leveling Head 4 mm joint from 37 a 60 mm, base diameter 210 mm.....	pc.	-
Dak.D.TER09.1183/4L60	Hercules Paving - Self-Leveling Head 4 mm joint from 60 a 94 mm, base diameter 230 mm.....	pc.	-
Dak.D.TER09.1183/4L94	Hercules Paving - Self-Leveling Head 4 mm joint from 94 a 150 mm, base diameter 230 mm.....	pc.	-
Dak.D.TER09.1183/4L150	Hercules Paving - Self-Leveling Head 4 mm joint from 150 a 270, base diameter 230mm.....	pc.	-
Dak.D.TER09.1183/P120	Extension h.120mm in polypropylene compatible with Hercules support 150, TER09-1183/1F150	pc.	-
Dak.D.TER09.1283	Adjustment key for Hercules	pc.	-