

ARKIMEDE 66 - DECKING | SELF-LEVELING




INDEX

1. Code registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification

1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg. / Pallet
TER09-1196/1A	ARKIMEDE 66 Self-leveling for Decking	from 66 to 121	0,358	30 pcs. / 450 pcs.

MATERIAL Made of PP (polypropylene).

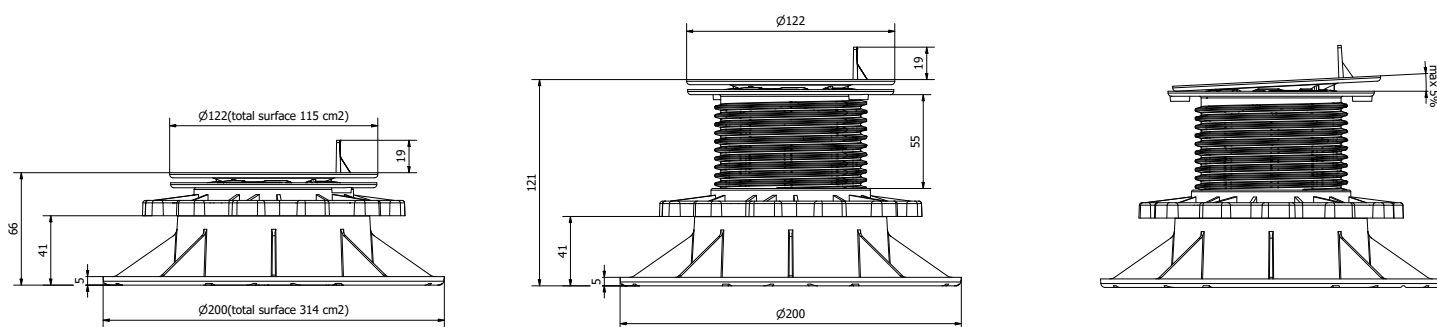

2. DESCRIPTION

Arkimede 66 Self-leveling is the perfect solution for you raised paving or decking.

This product combines the flexibility and the extremely easy-to-use attitude of the Arkimede line (with fixed head) with the plus of a self-leveling head (for slopes from 0 to 5%).

It is adjustable in height from 66 to 121mm (25, 50 and 100 mm extensions excluded) and it can be matched with all Arkimede 35 accessories.

The base allows the correct water outflow.

ARKIMEDE 66 - DECKING | SELF-LEVELING

3. USE

Used in external areas, terraces, pavements.

Operating temperature: from -40°C to +60°C.

The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans

5. LOAD TEST

In-house self-regulated test.

The support was subjected to an increasing load using a hydraulic press until initial failure occurred.

The test punch used to apply the load had a diameter of 150 mm.

The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1196/1A	Half height	13,17	1.342,6	2.957,40
	Full height	10,41	1.061,8	2.338,80

6. TECHNICAL SPECIFICATION

Code	Description	Unity	Price
Dak.O.TER09.1196/x	Supply and installation of self-leveling telescopic support for decking in height from 66 to 121 mm Dimensions: height adjustable from 66 to 121, 2 or 4 mm thickness spacer tabs self-leveling head Made of PP (polypropylene) Used in external areas, terraces, shared flooring ..	pcs.	-
Dak.O.TER09.1196/1A	1 tab.....	pcs.	-

