

ARKIMEDE 66 - PAVING | SELF-LEVELING




INDICE

- 1. Code registry
- 2. Description
- 3. Use
- 4. Fiedls of use
- 5. Load test
- 6. Technical specification

1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg / Pallet
TER09-1196/4A2M	ARKIMEDE 66 self-leveling - spacer tabs 2 mm thickness	from 66 to 121	0,24	30 pcs. / 450 pcs.
TER09-1196/4A4M	ARKIMEDE 66 self-leveling - spacer tabs 4 mm thickness	from 66 to 121	0,24	30 pcs. / 450 pcs.

MATERIAL Made of PP (polypropylene).

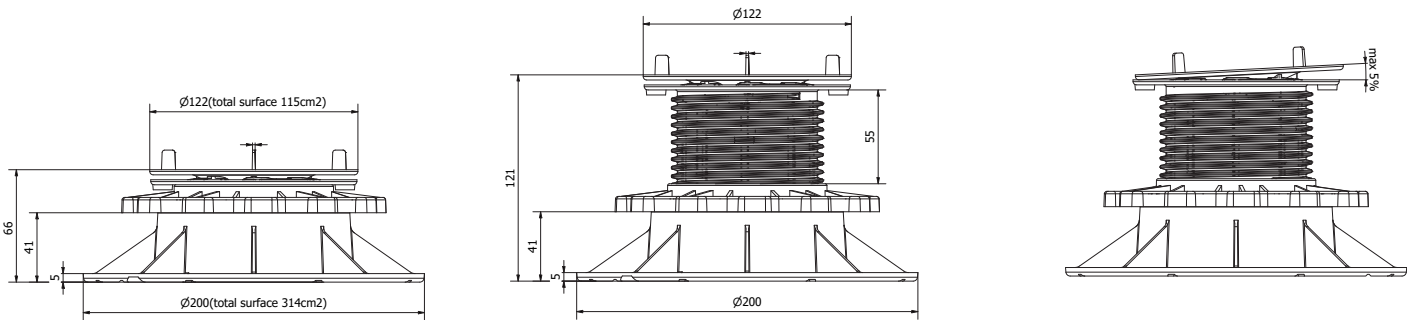

2. DESCRIPTION

Arkimede 66 Self-leveling is the perfect solution for you raised paving or decking.
This product combines the flexibility and the extremely easy-to-use attitude of the Arkimede line (with fixed head) with the plus of a self-leveling head (for slopes from 0 to 5%).
It is adjustable in height from 66 to 121mm (25, 50 and 100mm extensions excluded) and it can be matched with all Arkimede 35 accessories.

ARKIMEDE 66 - PAVING | SELF-LEVELING

3. USE

Arkimede 66 is a variable height telescopic support, from a minimum of 66mm, used for elevated external flooring. The self-leveling integrated head (for slopes up to max 5%) allows you to also be used on surfaces with different differences. With the specific extensions it is possible to extend the fee of the support. Operating temperature: 40°C / +80°C.

4. FIELDS OF USE


The Arkimede telescopic support 66 can only be used in external areas, on terraces, shared flooring, patios and walkable dehors. With the specific extensions it is possible to extend the height of the support.

The use of polishing and sanding machines is not recommended.

5. LOAD TEST

Code	Dimension	Max average load [N]
TER09-1196/4AxM	h = 66-121 mm	8,84

A punch of 150 mm diameter was used to carry out the test.

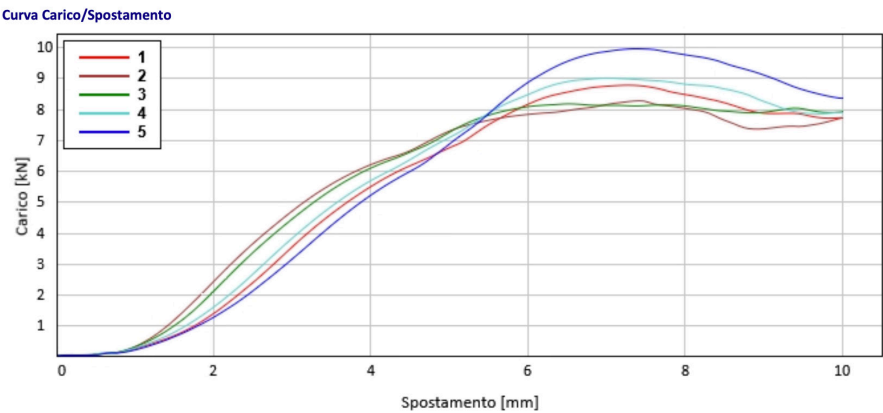

6. TECHNICAL SPECIFICATION

Voice	Description	Unit	Price
Dak.O.TER09.1196/4AxM	Supply and installation of self-leveling telescopic support in height from 66 to 121 mm Dimensions: height adjustable from 66 to 121 mm self-leveling head with spacer tabs 2 and 4 mm thickness. Base of 314 cm² Available in black color. Made of PP (polypropylene) Used in external areas, terraces, shared flooring.	pcs.	-
Dak.O.TER09.1196/4A2M	Arkimede 66 paving, with spacer tabs 2 mm thickness.....	pcs.	-
Dak.O.TER09.1196/4A4M	Arkimede 66 paving, with spacer tabs 4 mm thickness.....	pcs.	-