


SHEET METAL CONNECTION PROFILE STANDARD

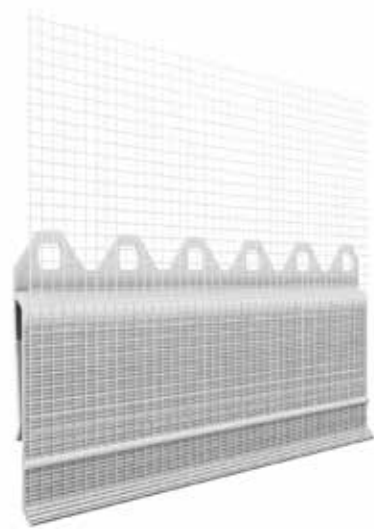



INDEX

- 1. Code registry
- 2. Description
- 3. Use
- 4. Technical specification

1. CODE REGISTRY

Code	Product	Measures (mm)	Weight (kg)	Pkg. / Pallet	UM
ZIN32-1679	Sheet metal connection profile standard	65 x 165 x 2.600	4,57	62,5 m / 2.500 m (40 boxes)	cf.

MATERIAL Made of PVC and fiberglass mesh.

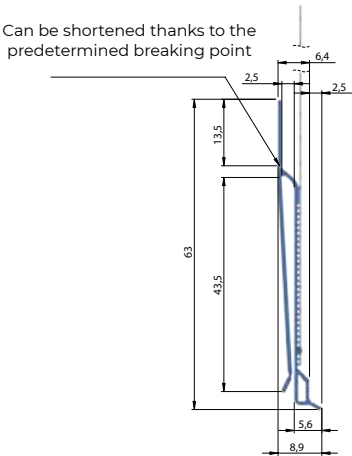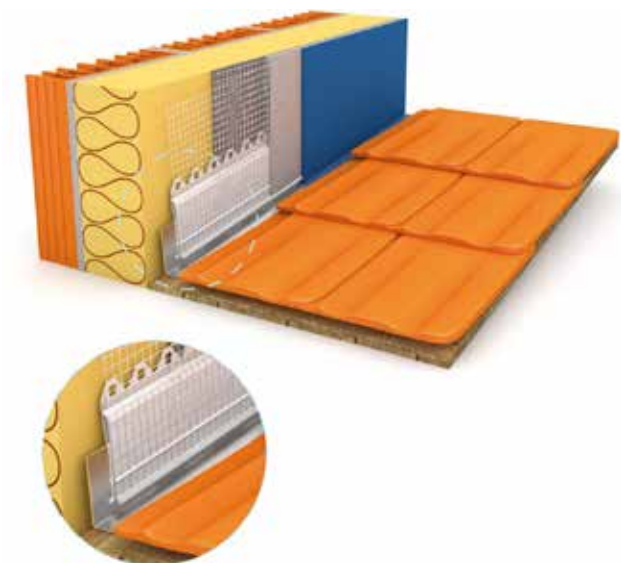

ROMPIGOCCIA PER SCOSSALINA

2. DESCRIPTION

- Reinforced angle with fiberglass mesh, R131, heat-sealed. The plastic profile is reinforced so as to make the surface homogeneous at the end of the painting.
- Targeted rainwater drainage
 - Prevents damage caused by joint compression
 - Ensures a clean finish
 - No cracking thanks to decoupling from the sheet metal
 - Eliminates the need for any additional adhesive tape
 - plug-in connector
 - The guide is rainproof
 - The maintenance-free joint
 - Maintains a permanent seal thanks to the circumferential adhesive tape

Product	Sheet metal connection profile with snap-in connector
Item Number	ZIN32-1679
Profile Length	2,5 m
Mesh / Mesh Width	custom
Mesh Binding	welded
Packaging Unit	25 pieces per box
Package Contents	62.5 m/box
Packaging Units per Pallet	40 boxes/pallet
Package Contents per Pallet	2,500 m/pallet
Profile Material	Polyvinyl chloride (PVC)

3. USE

Used to reinforcement and protection of horizontal angles (architraves, balconies, stringcourses, centileveler elements, etc.), it acts as a drip-breaker. It is paintable

4. TECHNICAL SPECIFICATION

Item	Descrizione	U.M.	Price
Dak.B.ZIN32.1679	Supply and installation of reinforced angle with fiberglass mesh R131, heat-sealed. Measures: 65 x 165 x 2.600 Made of PVC and fiberglass net.	cf.	-