


SPECIAL EXPOSED DRIP SPLITTER

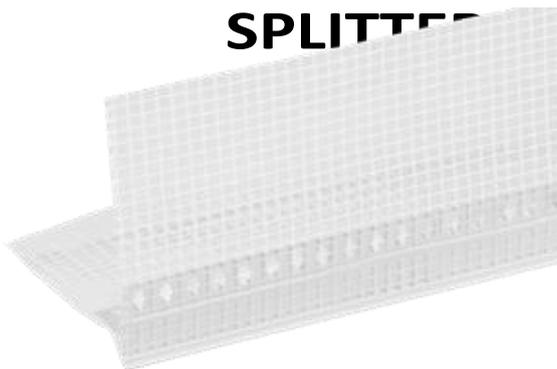


INDEX

1. Data and Documentation
2. Use
3. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
ZIN33-1669RVS	Vista Special	100 x 100 x 2,500	10.30 kg/cf.	White	62.5 m / 30 cf.

MATERIAL Made of PVC and fibreglass mesh.

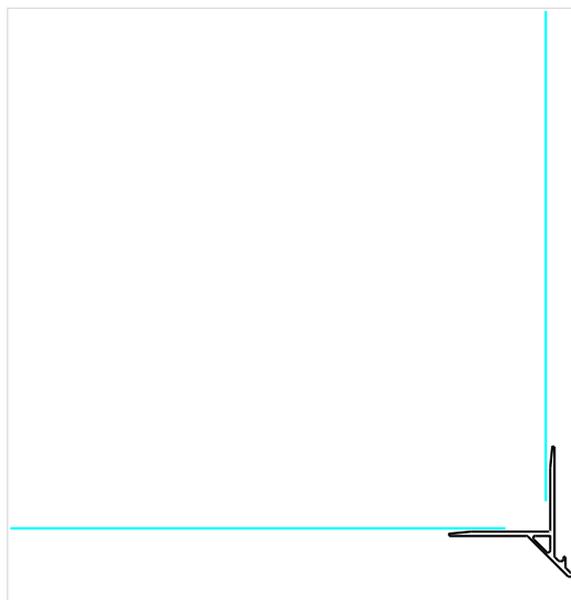

SPECIAL EXPOSED DRIP SPLITTER

Features	Units of Measurement	R131	
		Warp	Plot
Setting	for 10 cm	25 x 2	20,5
Standard Height	cm	110	
Roll length	m	50	
Thickness Treated Fabric	mm	0,52	
Raw Fabric Weight	g/m2	131	
Thickness Treated Fabric	min g/m2	160 ± 5% (max 168 g - min 152 g)	
Fuel Content (LOI)	% of mass	20%	
Treatment Type		Alkali-resistant without emollients	
Dimensions Wheelbase	mm	3,5 x 3,8	

Tensile strength (TS) and elongation:

Minimum tensile strength (N/50 mm) and maximum elongation (%) is ascertained according to DIN EN ISO 13934-1 as follows

Deposition method	Tensile strength		Elongation
	Nominal Value	Individual Value	Average Value
Standard Conditions	2.000 / 2.200	1.900 / 1.900	3,8 / 3,8
Solution 5% NaOH	1.140 / 1.300	1.200 / 1.200	3,5 / 3,5
Quick Test	1.500 / 1.700	1.250 / 1.250	3,5 / 3,5
Solution 3 iont		1.000 / 1.000 50 % / 50 %	

Tolerances:

Setting: ± 5% in Warp and Weft
 Height: ± 1%
 Length: ± 2%
 LOI: ± 3%

Quality Inspection

The mode of quality control, taking samples and shooting the material, is according to standard 0326 works. Packing:

The rolls are packed vertically in cardboard boxes on a pallet. Warehouse:

Rolls must be stored in a dry place. Storage temperature -10 °C to + 50 °C.

2. USE

Used to reinforce and protect horizontal corners (lintels, balconies, stringcourses, cantilevered elements, etc), it acts as a drip breaker. It can be painted.

3. SPECIFICATION ITEMS

Entry	Description	U.M.	Price
Dak.B.ZIN33.1669RVS	<p>Supply and installation of 'claw corner' with glass fibre mesh, R131, heat-sealed.</p> <p>Anti-cracking glass fibre net for 'overcoat' insulation, made of E-glass fibre with 20% anti-alkaline sizing, raw fabric weight 131 g. The weight of the treated fabric shall be 160 g/m2 (with an appreciable deviation of 5%). The mesh size shall be 3.5 x 3.8 mm. The breaking load of the mesh in standard conditions shall have a nominal value equal to and not less than 2000 N/50 mm warp direction, 2200 N/50 mm weft direction, individual value equal to 1 9 0 0 N / 5 0 m m warp direction, 1900 N/50 mm weft direction. The elongation shall be as an average value close to 3.8 in warp direction and 3.8 in weft direction.</p> <p>The product must be laid with the mesh placed in the layer of adhesive, taking care that it is perfectly embedded, using a notched trowel or trowel for this purpose. The joint must be well inserted into the joint filled with insulation material and also well secured at the corners. Its use makes it possible to compensate for differential expansion of masonry, prevents pollutants and moisture from entering the joint, and is weatherproof. Overlaps with the mesh should never be less than 10 cm. It must be perfectly smoothed until it is completely covered.</p> <p>The plastic profile can be shaved, so that the surface is homogenous after painting. Made of PVC and glass fibre mesh.</p> <p>Used to reinforce and protect horizontal corners (lintels, balconies, stringcourses, cantilevered elements, etc.), it serves as nag-breaker.</p>	cf.	-