

BLACK PHOSPHATED SELF-TAPPING SCREW NAIL TIP WOOD PITCH



INDEX


1. Data and Documentation
2. Use
3. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
MIN01-5206	Black Phosphated Self-Threading Screw Nail Tip Wood Pitch	ø 3.5 x 25	1.25 kg/cf.	Black	1,000 pcs. / 432,000 pcs.
MIN01-5207	Black Phosphated Self-Threading Screw Nail Tip Wood Pitch	ø 3.5 x 35	1.74 kg/cf.	Black	1,000 pcs. / 288,000 pcs.
MIN01-5208	Black Phosphated Self-Threading Screw Nail Tip Wood Pitch	ø 3.5 x 45	1.88 kg/cf.	Black	500 pcs. / 144,000 pcs.

MATERIAL

Made of steel with phosphating treatment for protection.

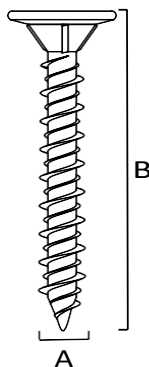

	A	B
5206	ø 3,5	25,00 mm
5207	ø 3,5	35,00 mm
5208	ø 3,5	45,00 mm

2. USE

Used for plasterboard and wood.

3. SPECIFICATION ITEMS

Entry	Description	Unit	Price
Dak.B.MIN01.520x	Supply and installation of Screw for fastening wooden structures. Dimensions ø 3.5 x 25, ø 3.5 x 35, ø 3.5 x 45 mm. Packed in boxes of 1,000 or 500 pcs. Made of steel with a phosphating treatment for protection. Used for plasterboard and wood.		
Dak.B.MIN01.5206	ø 3.5 x 25 mm.....	cf.	-
Dak.B.MIN01.5207	ø 3.5 x 35 mm.....	cf.	-
Dak.B.MIN01.5208	ø 3.5 x 45 mm.....	cf.	-

