

# ARKIMEDE 18 - DECKING







## INDEX

1. Code Registry
2. Description
3. Use
4. Fields of use
5. Load test
6. Technical specification


## 1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight (kg)	Pkg. / Pallet
TER09-1145/1A	ARKIMEDE 18 - Decking	from 18 to 36	0,157	30 pcs / 1.200 pcs

**MATERIAL** Made of PP (polypropylene).

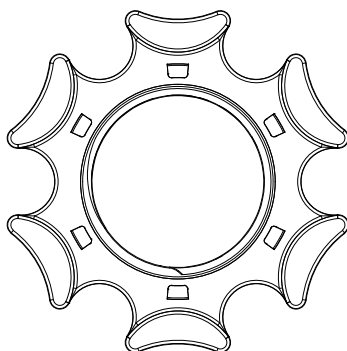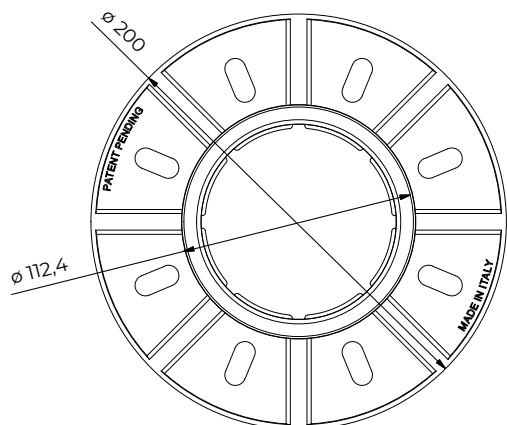

# ARKIMEDE 18 - DECKING

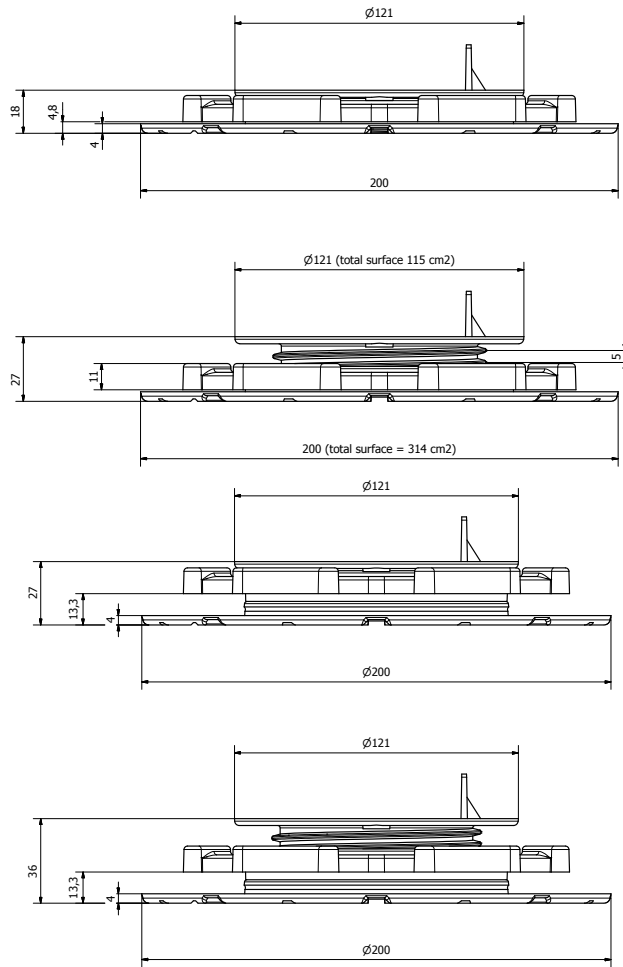

## 2. DESCRIPTION

ARKIMEDE 18 support with adjustable height starting from 18 mm.

Base laying surface: 314 cm<sup>2</sup>.

Head diameter: 120 mm with a laying surface of 113 cm<sup>2</sup>.

Available versions:

- Box composed by the base, rotating nut and head with 1 tab for decking and **9 mm extension**.

The base allows the correct water drainage.

## 3. USE

Used in external areas, terraces, pavements.

Operating temperature: from - 40 ° C to + 80 ° C.


## 4. FIELDS OF USE

Waterproof membrane, hard insulating panels, screeds and solid and compact pose plans

# ARKIMEDE 18 - DECKING

## 5. LOAD TEST

	Maximum Load at yield [kN]
<b>Test 1</b>	10,90
<b>Test 2</b>	10,70
<b>Test 3</b>	11,60
<b>Average Value</b>	<b>11,06</b>

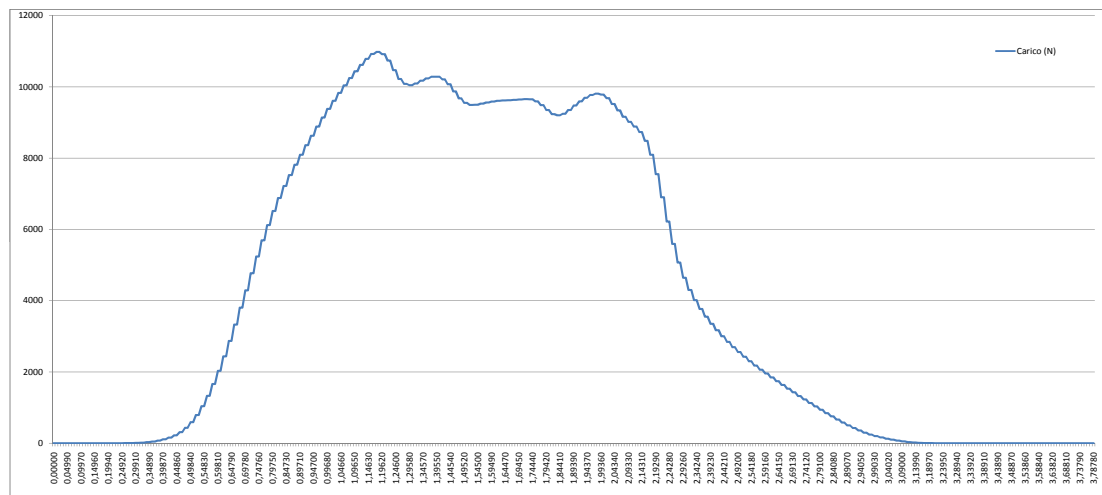

## 6. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
<b>Dak.O.TER09.1145/x</b>	Supply and installation of ARKIMEDE 18 DECKING support with adjustable height starting from 18 mm to a maximum of 36 mm. Base laying surface: 314 cmq. Head diameter: 120 mm with a laying surface of 113 cmq. Available versions: • Box composed by the base, rotating nut and head with 1 tab for joists and 9 mm extension. The base allows the correct water drainage. Made of PP (polypropylene). Used in external areas, terraces, pavements.	pcs	-
<b>Dak.O.TER09.1145/1A</b>	1 tab.....	pcs	-