


# BASEBOARD



## INDEX


1. Code Registry
2. Use
3. Technical Specification

## 1. CODE REGISTRY

Code	Description	(mm)	Weight	Colour	Pkg. / Pallet
LV291	Baseboard - Kansas	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV292	Baseboard - Alaska	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV293	Baseboard - Oregon	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV294	Baseboard - Colorado	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV295	Baseboard - California	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV296	Baseboard - Texas	70 x 10 x 2.500	3,27 kg/pc.	-	20 pcs. / 300 pcs.
LV280/PZ	White Baseboard	70 x 10 x 2.500	3,27 kg/pc.	White	20 pcs. / - pcs.

### MATERIAL

Made of PVC (LV280) and compound PVC vinyl foam lead-free, self-extinguishing. Stabilized eco-compatible salt-based Ca-Zn.

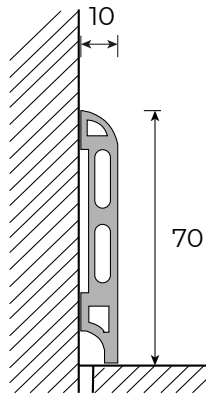

# BASEBOARD

## 2. USE

Range of a non-toxic and shock proof PVC foam baseboard board, foiled with UV resistant Alcrom®Plus decorative film.

Does not contain formaldehyde (UNI EN 717-2 1996:1996), can be used in humid environments (water absorption <1% UNI EN ISO 62:2008), resists the cold liquid aggression (UNI EN 12720:2009) and it is resistant to impact and abrasion in class AC3 (EN 13329/00).

Depending on the model, they can be laid using suitable adhesives.

### LAYING INSTRUCTIONS

1. Take the baseboard board out of the packaging.
2. Measure and cut the baseboard board to the required length with the proper tools.
3. Verifying that the laying area is perfectly clean and then place the baseboard board, now cut to measure, in the correct position, fixing it to the wall with the appropriate adhesive.
4. Keep sufficiently pressure for a few minutes on the entire length of the baseboard board in order to ensure sufficient adhesion to the laying surface.

### CARE AND MAINTENANCE

PVC - These need no particular maintenance and are easily cleaned with colorless alcohol diluted in water, or with normal detergents diluted in water (though not acid-based products); rinse thoroughly when finished, with water only.  
Use a sponge and/or non-abrasive cloth to prevent scratches and/or damage to the surface.

## 3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
<b>Dak.I.LV2xx</b>	Supply and installation of Baseboard. Compound PVC vinyl foam lead-free, self-extinguishing. Stabilized eco-compatible salt-based Ca-Zn. In addition to the decorative function, it meets the technical requirement to hide the perimeter expansion space in floating flooring.		
<b>Dak.I.LV291</b>	Alaska.....	pc.	-
<b>Dak.I.LV292</b>	Oregon.....	pc.	-
<b>Dak.I.LV293</b>	Colorado.....	pc.	-
<b>Dak.I.LV294</b>	Kansas.....	pc.	-
<b>Dak.I.LV295</b>	California.....	pc.	-
<b>Dak.I.LV296</b>	Texas.....	pc.	-
<b>Dak.I.LV280/PZ</b>	White.....	pc.	-