

ARKIMEDE 121 - DECKING | SELF-LEVELING




INDEX

- 1. Registry code
- 2. Description
- 3. Use
- 4. Fields of use
- 5. Load test
- 6. Technical specification

1. REGISTRY CODE

Code	Description	Measures (mm)	Weight (kg)	Pkg. / Pallet
TER09-1197/1A	ARKIMEDE 121 - Decking self-levelling	from 121 at 226	0,360	15 pcs. / 225 pcs.

MATERIAL PP (poliipropylene)

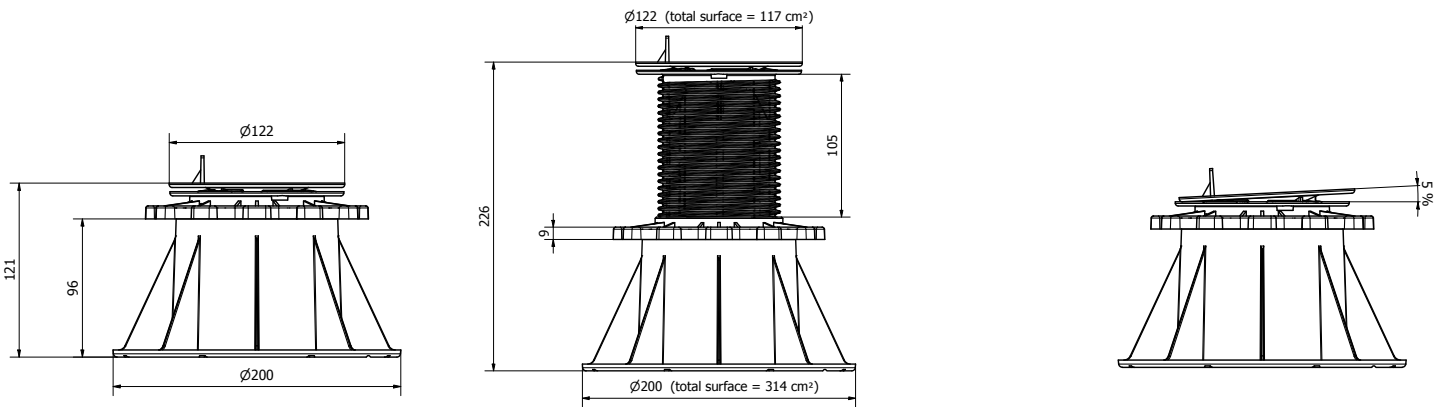

2. DESCRIPTION

ARKIMEDE 121 self-leveling telescopic support, the perfect solution for elevated decking with variable slopes.
This product combines the flexibility and extreme ease of use of the Arkimede line (with fixed head) with the added bonus of an integrated self-leveling head (for slopes from 0 to 5%).
It is height adjustable from 121 to 226 mm (optional extensions excluded) and can be combined with all Arkimede 35 accessories (except for the 25 and 50 mm extensions).
The base allows for proper water drainage.

ARKIMEDE 121 - DECKING | SELF-LEVELING

3. USE

The Arkimede 121 Telescopic Support can be used in outdoor areas, terraces, and shared flooring.
The height of the Support can be extended using the appropriate extensions.
Operating temperature: from -40°C to +60°C.
The use of polishing and sanding machines is not recommended.

4. FIELDS OF USE

Membrana impermeabile, pannelli isolanti rigidi, massetti e piani di posa solidi e compatti

5. LOAD TEST

In-house self-regulated test.
The support was subjected to an increasing load using a hydraulic press until initial failure occurred.
The test punch used to apply the load had a diameter of 150 mm.
The following are the certified average values:

Code	Conditions	Maximum load		
		[kN]	[kg]	[lbs]
TER09-1197/1A	Half height	18,41	1.876,8	4.133,80
	Full height	15,13	1.542,7	3.398,00

6. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
Dak.O.TER09.1197/1A	Supply and installation of self-leveling telescopic support for decking with a height of 121 to 226 mm. Dimensions: adjustable height from 121 to 226 mm, self-leveling head with 1 wing for wooden joists. Made of PP (polypropylene). Used in outdoor areas, terraces, shared flooring, etc.	pc.	-